


# Serenade™

Seating Capacity .....	3 Adults	
Dimensions .....	83" x 66" x 30", (211 cm x 168 cm x 76 cm)	
Corner Radius .....	9" (23 cm)	
Dry Weight .....	460 lbs (209 kg)	
Filled Weight (Average Fill).....	2,042 lbs (926 kg)	
Water Capacity (Average Fill) .....	240 US gallons (910 Liters)	
Shipping Weight.....	460 lbs (209 kg)	
Export Shipping Weight:.....	<b>510 lbs (231 kg)</b>	
Electronic Controls .....	Programmable digital panel with LED readout	
Pump 1.....	North America (60 Hz): 2-Speed, 2.5 HP break, 1.5 HP continuous, 48 Frame	
Export (50 Hz):.....	<b>2-Speed, 2.0 HP continuous</b>	
Circulation Pump .....	Optional with ClearZone® Pro package	
Filtration (factory default).....	2 Cycles for a total of 2 hours	
Heater .....	1.0kW/4.0 kW	
Export (50Hz).....	<b>2.0 kW</b>	
Total @Home Jets .....	18	
Seat 1 UltraLounge Jets .....	2 Cluster Storm Rifled, 3 Power Storm Twirl, 2 Power Storm Twister, 2 Pillow Mini Directional	
Seat 2 Jets .....	6 Cluster Storm Directional	
Seat 3 Jets .....	2 Mini Storm Rifled, 1 Poly Storm Rifled	
Massage Selectors .....	None	
Special Features.....	Tactile Therapy	
Water Management System .....	One 75 ft <sup>2</sup> filter cartridge; 8" Weir	
Optional .....	ClearZone® Pro Water Purification System	
LED Lighting .....	One multi Color LED footwell light	
Optional .....	Crystal FX™	
Synthetic Cabinet Colors .....	Adobe Tan, Stoneridge Grey	
Terracina™ Cabinet (Optional) .....	Driftwood, Vintage Cedar, Midnight Maple	
Acrylic Colors .....	Moonstone, UltraLife, Sunstone, Smoked Marble, UltraLife Gray, Desert Stone	
Headrests.....	1 Jet Therapy Pillow	
Water Feature.....	None	
Electrical Requirements: .....	North America (60 Hz): 120V@15A or 240 VAC@30A or 40A <b>Export (50 Hz): 230 VAC@1x16A, 1x32A, 2x16A, 3x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs</b>	
Warranty* .....	North America (60 Hz): Lifetime for UltraLife Shell Surface, 5 Years Acrylic Shell Surface, 3 Years Plumbing, 3 Years Equipment and Controls, 7 Years Cabinet, 1 Year Water Purification System, 2 Years for Jet Insert, 1 Year for Jet Escutcheon, 1 Year Lights; <b>Export (50 Hz): 10 Years for UltraLife Shell Surface, 5 Years Acrylic Shell Surface, 2 Years Plumbing, 2 Years Equipment and Controls, 2 Years Cabinet, 1 Year Water Purification System, 2 Years for Jet Insert, 1 Year for Jet Escutcheon, 1 Year Lights</b>	
Audio System (Optional) .....	N/A	

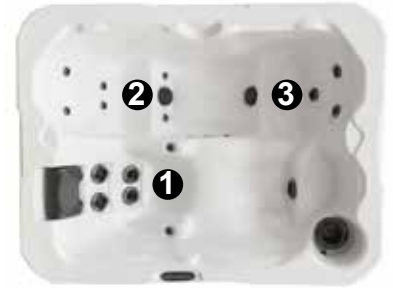

**Optional  
escutcheon jets**

\*(See Warranty Document for Specific Details)

# Serenade

## Massage Selector Diagram

Pump 1 - Drain & Skimmer



1. Pump 1 all jets

Spa Operation Subject to Change without Notice

## Seat Depths

- 1 = 25.00" (63.50 cm)
- 2 = 26.00" (66.04 cm)
- 3 = 26.00" (66.04 cm)
- 4 = 27.00" (68.58 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance  $\pm 0.5"$  (1.27 cm).**



Dimensions/Specifications are Subject to Change Without Notice

# Serenade

## Jet Designation

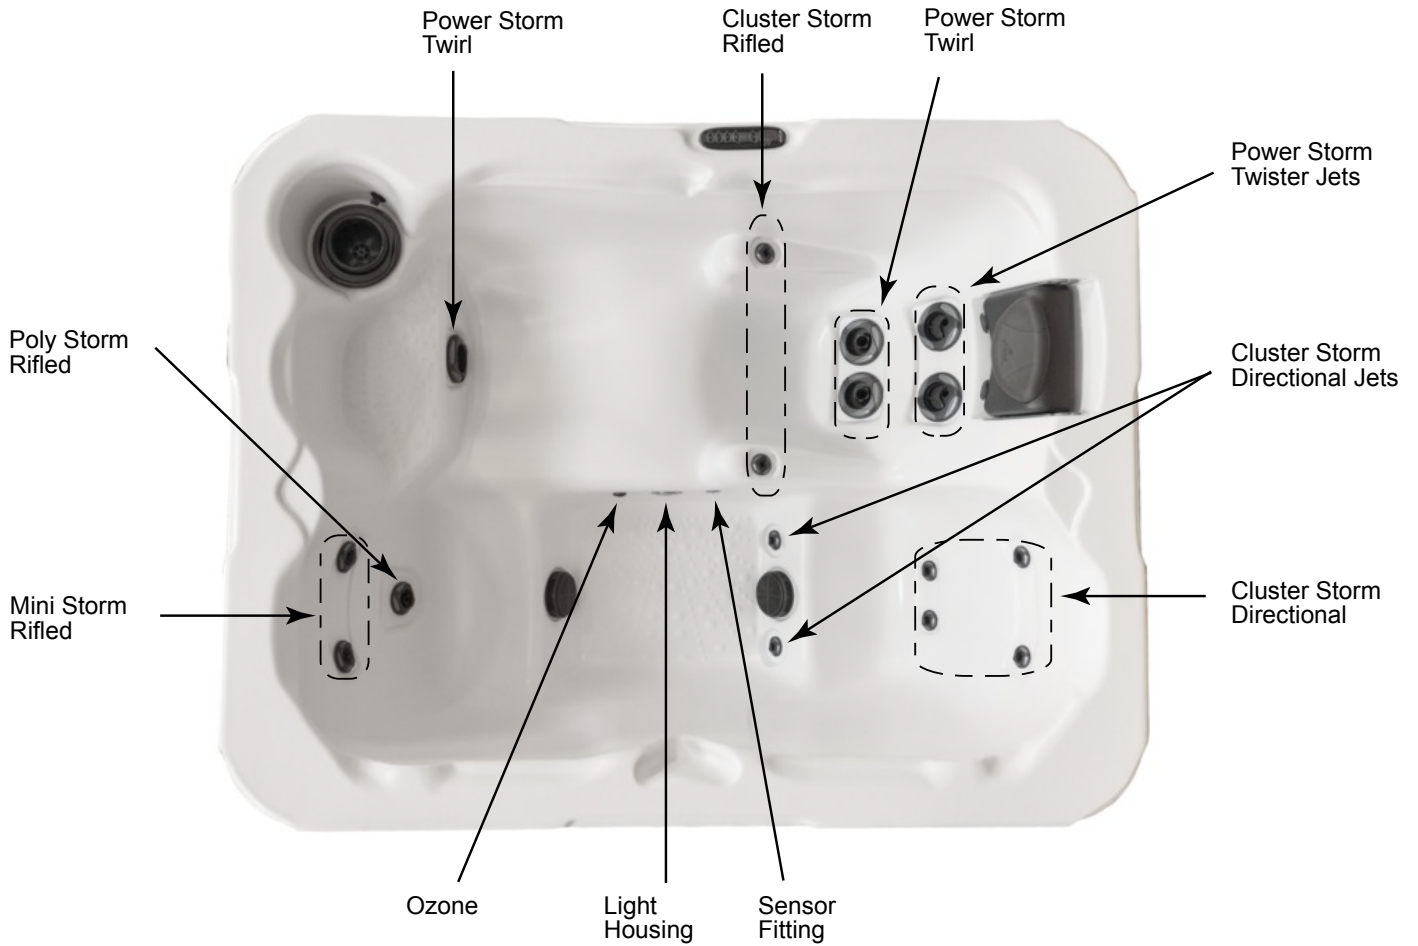


Dimensions/Operation/Specifications are Subject to Change Without Notice

### 18 Total Jets (textured)





### Total Jets

# Serenade

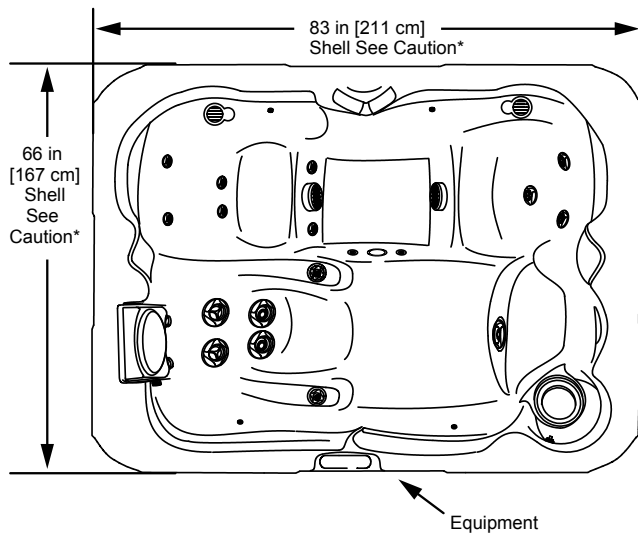

Front View of Spa

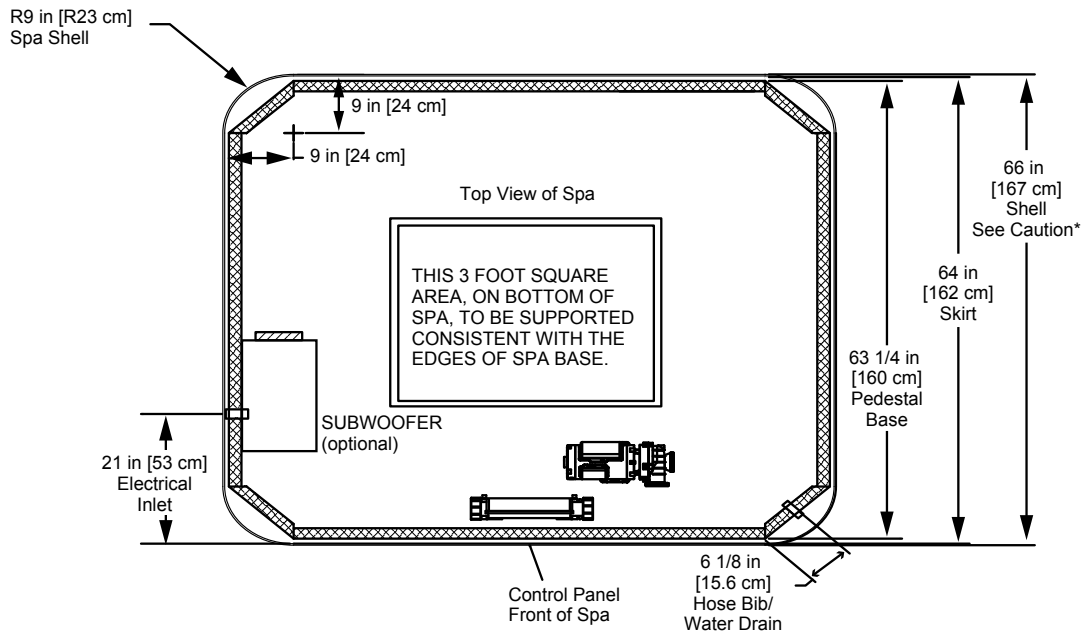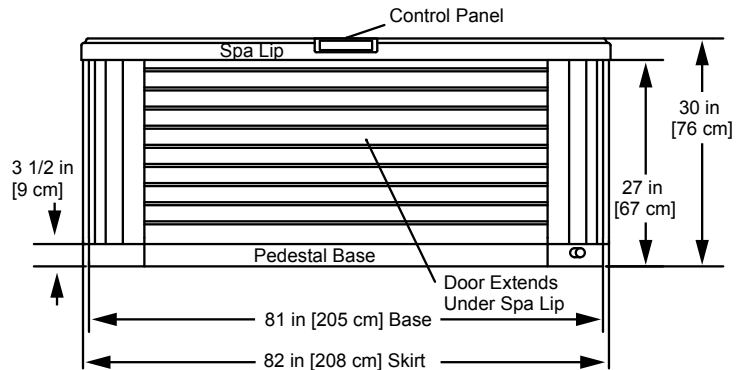

**Note:**

1. Subject to change without notice.
2. Engineering specs may differ slightly from brochure.
3. For E-Z lifter installation allow 18" (45.7cm) clearance on the backside of the spa.
4. Alternative cabinets may add significant weight. Ask your dealer for exact details.
5. Stereo Optional.



**\*Caution:**

Due to manufacturing tolerances there could be some minor differences between the actual spa and the drawing above. **If site planning is critical to such tolerances, be sure to measure your actual spa.**